



470 SRD

MILITARY & PROFESSIONAL BOAT



MOTEUR
HORS-BORD



GAMME SILLINGER

SRD : The concept of the SRD (Sillinger Rapid Deployment) folding boat allows intervention units to operate in optimal conditions of speed, efficiency and discretion, night and day. Whatever the sea conditions, it can also be deployed by airdrop or underwater..

MISSIONS

- Commandos
- Infiltration / Exfiltration
- Defence of strategic sites
- Search & Rescue / Emergency
- Diving

CERTIFICATIONS & PARTNERSHIPS



⚙️ TECHNICAL SPECIFICATIONS

Total length	4,59 m	Hypalon / Neoprene fabric	1670 decitex label Orca
Total width	1,94 m	Number of compartments	4 + quille + 2 speedtubes
Internal length	3,19 m	Recommended power	40 CV
Internal width	0,91 m	Maximum power	60 CV
Float diameter	0,49 m	Colour of the floats	Noir et Gris
Empty weight	126 kg	Capacity	10 passagers
Max. load (excl. motor)	1100 kg	Dim. Rolled without floor	1,48 x 0,8 x 0,65 m

🛶 FLOAT

Made of CSM (Hypalon / Neoprene) fabric with the ORCA label, SILLINGER has been applying its unique double cold gluing technology in France for over 60 years. This technology, applied under climatic control in our French workshop, integrates an internal reinforcement band to ensure a perfect edge seal and increase the operational life of the boats. The CSM (Hypalon) covering the outer surface is an elastomer which is highly resistant to heat, abrasion and hydrocarbons, unlike coated fabrics made of plastomer (P.V.C.). The assembly of Sillinger floats is guaranteed for 5 years in professional use.

⚙️ STANDARD EQUIPMENT

- Float Hypalon / Neoprene 1100 decitex label Orca
- Single point HP quick inflation system
- 160 mm perimeter anti-drag strip
- 2 front towing rings on float
- Peripheral bolt rope
- Vacuum hose + vacuum sleeve
- Rings on transom for towing
- Anti-drag strip under keel
- Inflatable keel + roll out floor aluminium blade
- Recall strap + rings on floor
- Float repair kit + inflator
- User manual - FR / AN
- 2 Removable Speedtubes + anti-drag protection
- 4 Reinforced lifting rings
- Rear panel with protection and holding system
- 4 D7 inflation valves + 2 A6 pressure relief valves
- 4 ITV valves on main float
- Reinforced SS front handle + 6 carrying handles
- 6 Internal lashing rings on float
- 2 Multiple paddle holders + 6 paddles

⊕ OPTIONS

- + Grounding pads under float
- + Carrying handle on inside cone
- + Towing V
- + Specific marking on float
- + Flexible tank
- + Protective cover
- + Other float colours (orange, red, green...)
- + XL storage bag
- + D-ring for fixing to float
- + Special seat reinforcement
- + Reinforced wrist straps
- + Mooring kit
- + Foot-strap on floor
- + A6 pressure relief valves


🛡️ QUICK INFLATION SYSTEM

The SRD system consists of a compressed air or CO2 cylinder connected to the float and keel by means of an intercommunication valve system. This device allows simultaneous inflation of the whole boat in less than 45 seconds.

🧩 CUSTOMIZATION

Customize your boat according to your specific needs. With a know-how acquired since 1962, our teams will advise you according to the specificities of your mission.

More information on: www.sillinger.com

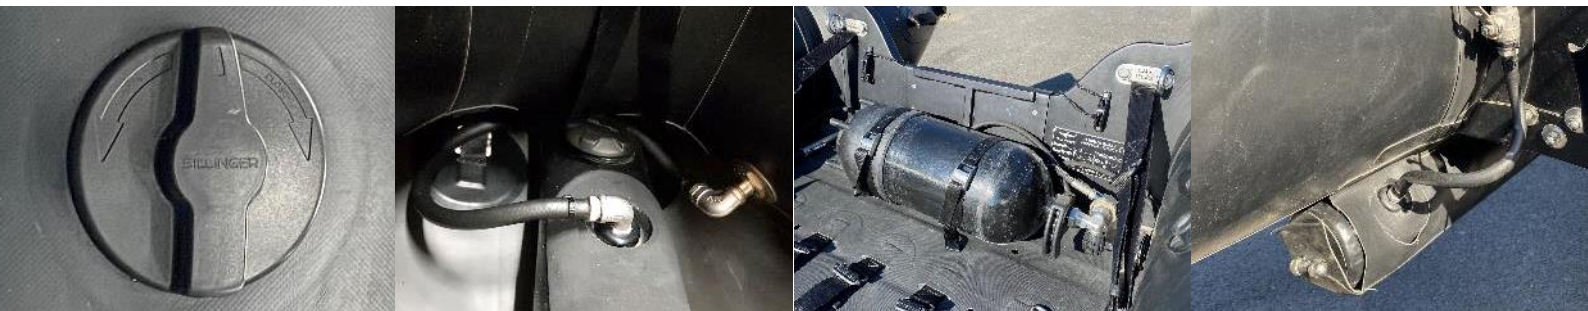

📍 14 rue de Buray - ZI des portes de Chambord
41500 Mer - France
☎ Tél. +33 (0)2 54 81 08 32
☎ Fax +33 (0)2 54 81 32 95
✉ contact@sillinger.com

SILLINGER.FR




Un savoir-faire MARCK & BALSAN



SYSTEM SRD SUB



OPTION FOR SRD FOLDABLE BOAT

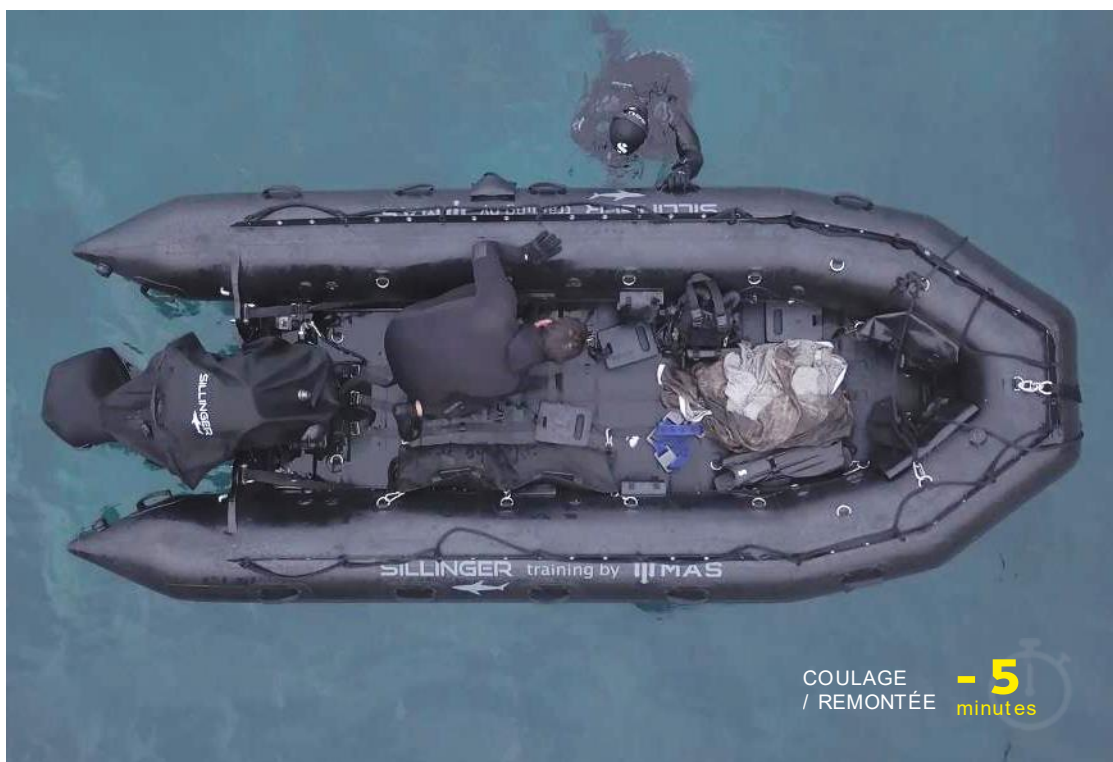

SILLINGER SUBMERSIBLE TECHNOLOGY

SRD SUB : This innovation, compatible with Sillinger's SRD folding range, allows the boat to be submerged to provide underwater concealment for commando missions. This technology is also compatible with advanced operations such as air transport, airdrops or deployment / recovery from a submarine. The strengths of this craft are the speed of implementation (sinking / raising in less than 5 minutes) and the ease of handling (operable by one person). Translated with www.DeepL.com/Translator (free version)

MISSIONS

- Commandos
- Infiltration
- Exfiltration

CERTIFICATIONS & PARTNERSHIPS



TECHNICAL SPECIFICATIONS

Inflation time	45 seconds
Immersion time	< 180 seconds
Immersion depth	15 m
Air droppable	Yes
Helicopter transport	Yes

Emersion time	< 120 secondes
Sinking technic	Gravity only
Air transportable	Yes
Submarine deployment	385 & 425 only

ACCESORIES REQUIRED ON SRD BOAT



EQUIPMENT

- Immersion « V »
- CO₂ 12L Cylinder / 380 SRD / 425 SRD / 470 SRD
- CO₂ 15L Cylinder / 525 SRD
- 2 Quick deflation valves on cones
- 2 SRD inside cônes handles for transport
- Additional sleeve with extra halyard
- 2 Interior lifeline
- 2 pax turnaround ropes
- 2 Black/black logo

OPTIONS

- + Engine immersion bag
- + Towing V
- + Mooring Kit
- + Immersion paddle bag
- + 25 L fuel tank
- + Immersion ballast
- + Inflator with additional pressure gauge
- + Waterproof bow bag

FAST INFLATION SYSTEM

The SRD system consists of a compressed air or CO₂ cylinder connected to the float and keel by means of an intercommunication valve system. This device allows simultaneous inflation of the whole assembly in less than 45 seconds.

CUSTOMIZATION

Customize your boat according to your specific needs. With a know-how acquired since 1962, our teams will advise you according to the specificities of your mission.

More information on: www.sillinger.com



14 rue de Buray - ZI des portes de Chambord
41500 Mer - France
Tél. +33 (0)2 54 81 08 32
Fax +33 (0)2 54 81 32 95
contact@sillinger.com

SILLINGER.FR



Un savoir-faire MARCK & BALSAN