



## 470 SRD

MILITARY & PROFESSIONAL BOAT



OUTBOARD ENGINE



### SILLINGER RANGE

**SRD** : The concept of the SRD (Sillinger Rapid Deployment) folding boat allows intervention units to operate in optimal conditions of speed, efficiency and discretion, night and day. Whatever the sea conditions, it can also be deployed by airdrop or underwater.

#### MISSIONS

- Commandos
- Infiltration / Exfiltration
- Defence of strategic sites
- Search & Rescue / Emergency
- Diving

#### CERTIFICATIONS & PARTNERSHIPS



## ⚙️ TECHNICAL SPECIFICATIONS

Total length	4,59 m	Hypalon / Neoprene fabric	1670 decitex label Orca
Total width	1,94 m	Number of compartments	4 + quille + 2 speedtubes
Internal length	3,19 m	Recommended power	40 CV
Internal width	0,91 m	Maximum power	60 CV
Float diameter	0,49 m	Colour of the floats	Black and grey
Empty weight	126 kg	Capacity	10 passagers
Max. load (excl. motor)	1100 kg	Dim. Rolled without floor	1,48 x 0,8 x 0,65 m

## 🛶 FLOAT

Made of CSM (Hypalon / Neoprene) fabric with the ORCA label, SILLINGER has been applying its unique double cold gluing technology in France for over 60 years. This technology, applied under climatic control in our French workshop, integrates an internal reinforcement band to ensure a perfect edge seal and increase the operational life of the boats. The CSM (Hypalon) covering the outer surface is an elastomer which is highly resistant to heat, abrasion and hydrocarbons, unlike coated fabrics made of plastomer (P.V.C.). The assembly of Sillinger floats is guaranteed for 5 years in professional use.

## ⚙️ STANDARD EQUIPMENT

- Float Hypalon / Neoprene 1100 decitex label Orca
- Single point HP quick inflation system
- 160 mm perimeter anti-drag strip
- 2 front towing rings on float
- Peripheral bolt rope
- Vacuum hose + vacuum sleeve
- Rings on transom for towing
- Anti-drag strip under keel
- Inflatable keel + roll out floor aluminium blade
- Recall strap + rings on floor
- Float repair kit + inflator
- User manual - FR / EN
- 2 Removable Speedtubes + anti-drag protection
- 4 Reinforced lifting rings
- Rear panel with protection and holding system
- 4 D7 inflation valves + 2 A6 pressure relief valves
- 4 ITV valves on main float
- Reinforced SS front handle + 6 carrying handles
- 6 Internal lashing rings on float
- 2 Multiple paddle holders + 6 paddles

## ⊕ OPTIONS

- + Grounding pads under float
- + Carrying handle on inside cone
- + Towing V
- + Specific marking on float
- + Flexible tank
- + Protective cover
- + Other float colours (orange, red, green...)
- + XL storage bag
- + D-ring for fixing to float
- + Special seat reinforcement
- + Reinforced wrist straps
- + Mooring kit
- + Foot-strap on floor
- + A6 pressure relief valves


## 🛡️ QUICK INFLATION SYSTEM

The SRD system consists of a compressed air or CO2 cylinder connected to the float and keel by means of an intercommunication valve system. This device allows simultaneous inflation of the whole boat in less than 45 seconds.

## 🧩 CUSTOMIZATION

Customize your boat according to your specific needs. With a know-how acquired since 1962, our teams will advise you according to the specificities of your mission.

More information on: [www.sillinger.com](http://www.sillinger.com)

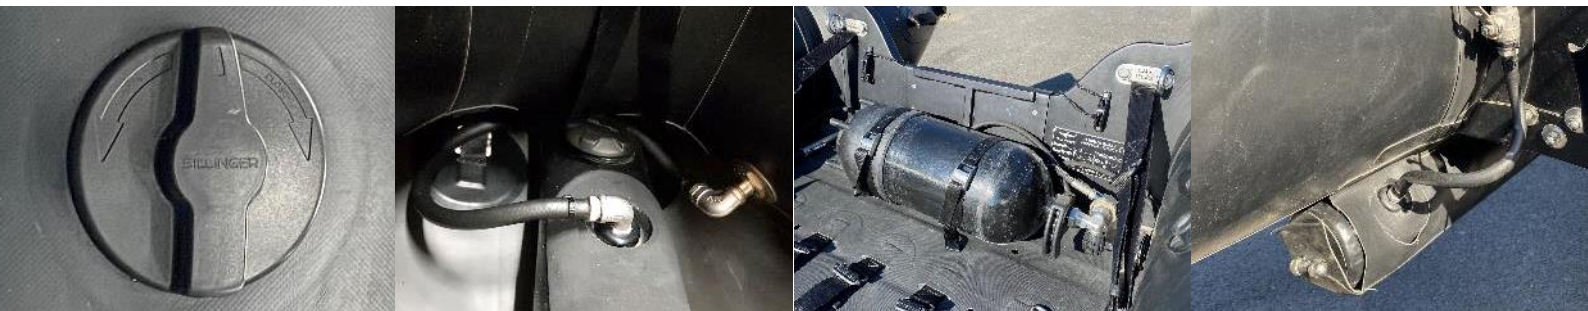

📍 14 rue de Buray - ZI des portes de Chambord  
41500 Mer - France  
☎ Tél. +33 (0)2 54 81 08 32  
☎ Fax +33 (0)2 54 81 32 95  
✉ [contact@sillinger.com](mailto:contact@sillinger.com)

**SILLINGER.FR**



A know-how MARCK & BALSAN