



525 SRD

MILITARY & PROFESSIONAL BOAT



OUTBOARD ENGINE



SILLINGER RANGE

SRD : The concept of the SRD (Sillinger Rapid Deployment) folding boat allows intervention units to operate in optimal conditions of speed, efficiency and discretion, night and day. Whatever the sea conditions, it can also be deployed by airdrop or underwater.

MISSIONS

- Commandos
- Infiltration
- Exfiltration

CERTIFICATIONS & PARTNERSHIPS



⚙️ TECHNICAL SPECIFICATIONS

Total length	5,13 m	Hypalon / Neoprene fabric	1670 decitex label Orca
Total width	2,21 m	Number of compartments	5 + quille + 2 speedtubes
Internal length	3,50 m	Recommended power	50 CV
Internal width	1,02 m	Maximum power	80 CV
Float diameter	0,56 m	Colour of the floats	Noir et Gris
Empty weight	160 kg	Capacity	12 passagers
Max. load (excl. motor)	1600 kg	Dim. Rolled without floor	1,53 x 0,75 x 0,46 m

🛶 FLOAT

Made of CSM (Hypalon / Neoprene) fabric with the ORCA label, SILLINGER has been applying its unique double cold gluing technology in France for over 60 years. This technology, applied under climatic control in our French workshop, integrates an internal reinforcement band to ensure a perfect edge seal and increase the operational life of the boats. The CSM (Hypalon) covering the outer surface is an elastomer which is highly resistant to heat, abrasion and hydrocarbons, unlike coated fabrics made of plastomer (P.V.C.). The assembly of Sillinger floats is guaranteed for 5 years in professional use.

⚙️ STANDARD EQUIPMENT

- Single point HP quick inflation system
- 160 mm perimeter anti-drag strip
- 2 front towing rings on float
- Peripheral bolt rope
- Vacuum hose + vacuum sleeve
- Rings on transom for towing
- Anti-drag strip under keel
- Inflatable keel + roll out floor aluminium blade
- Recall strap + rings on floor
- Float repair kit + inflator
- User manual - FR / EN
- 2 Removable Speedtubes + anti-drag protection
- 4 Reinforced lifting rings
- Rear panel with protection and holding system
- 2 Multiple paddle holders + 6 paddles
- Float Hypalon / Neoprene 1670 decitex label Orca
- 5 D7 inflation valves + 2 A6 overpressure valves
- 5 ITV valves on main float
- Stainless steel reinforced front handle + 8 carrying handles
- 8 Internal lashing rings on float

⊕ OPTIONS

- + Grounding pads under float
- + Carrying handle on inside cone
- + Towing V
- + Specific marking on float
- + Flexible tank
- + Protective cover
- + Quick deflation valves on cone
- + XL storage bag
- + D-ring for fixing to float
- + Special seat reinforcement
- + Reinforced wrist straps
- + Mooring kit
- + Foot-strap on floor
- + A6 pressure relief valves


🛡️ QUICK INFLATION SYSTEM

The SRD system consists of a compressed air or CO2 cylinder connected to the float and keel by means of an intercommunication valve system. This device allows simultaneous inflation of the whole boat in less than 45 seconds.

🧩 CUSTOMIZATION

Customize your boat according to your specific needs. With a know-how acquired since 1962, our teams will advise you according to the specificities of your mission.

More information on: www.sillinger.com

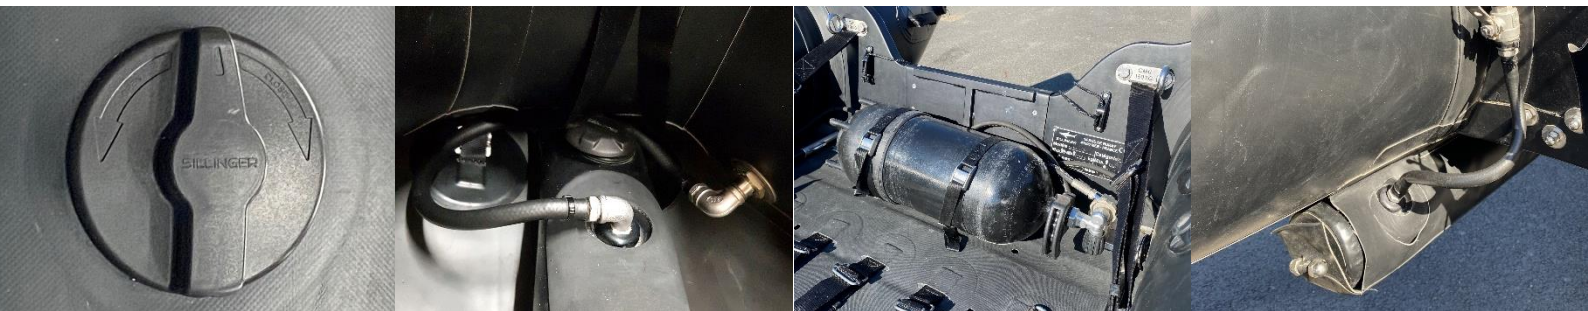

📍 14 rue de Buray - ZI des portes de Chambord
41500 Mer - France
☎ Tél. +33 (0)2 54 81 08 32
☎ Fax +33 (0)2 54 81 32 95
✉ contact@sillinger.com

SILLINGER.FR



A know-how **MARCK & BALSAN**