



425 SRD

MILITARY & PROFESSIONAL BOAT



OUTBOARD ENGINE



SILLINGER RANGE

SRD : The concept of the SRD (Sillinger Rapid Deployment) folding boat allows intervention units to operate in optimal conditions of speed, efficiency and discretion, night and day. Whatever the sea conditions, it can also be deployed by airdrop or underwater.

MISSIONS

- Commandos
- Infiltration / Exfiltration
- Defence of strategic sites
- Search & Rescue / Emergency
- Diving

CERTIFICATIONS & PARTNERSHIPS



⚙️ TECHNICAL SPECIFICATIONS

Total length	4,20 m
Total width	1,79 m
Internal length	2,84 m
Internal width	0,86 m
Float diameter	0,46 m
Empty weight	116 kg
Max. load (excl. motor)	1050 Kg

Hypalon / Neoprene fabric	1100 decitex label Orca
Number of compartments	3 + quille + 2 speedtubes
Recommended power	40 CV
Maximum power	50 CV
Colour of the floats	Black and grey
Capacity	8

🛶 FLOAT

Made of CSM (Hypalon / Neoprene) fabric with the ORCA label, SILLINGER has been applying its unique double cold gluing technology in France for over 60 years. This technology, applied under climatic control in our French workshop, integrates an internal reinforcement band to ensure a perfect edge seal and increase the operational life of the boats. The CSM (Hypalon) covering the outer surface is an elastomer which is highly resistant to heat, abrasion and hydrocarbons, unlike coated fabrics made of plastomer (P.V.C.). The assembly of Sillinger floats is guaranteed for 5 years in professional use.

⚙️ STANDARD EQUIPMENT

✚ OPTIONS

- Float Hypalon / Neoprene 1100 decitex label Orca
- 3 D7 inflation valves + 2 A6 overpressure valves
- 3 ITV valves on main float
- Single point HP quick inflation system
- 160 mm perimeter anti-drag strip
- Reinforced stainless steel front handle + 4 carrying handles
- 4 Internal lashing rings on float
- 2 front towing rings on float
- Peripheral bolt rope
- Multiple paddle holder + paddles
- Vacuum hose + vacuum sleeve
- Rings on transom for towing
- Anti-drag strip under keel
- Inflatable keel + roll out floor aluminium blade
- Recall strap + rings on floor
- Float repair kit + inflator
- User manual - FR / EN
- 2 Removable Speedtubes + anti-drag protection
- 4 Reinforced lifting rings
- Rear panel with protection and holding system

- + Aluminium floor
- + Inflatable floor
- + Waterproof storage bag
- + Lifting slings
- + Waterproof engine bag
- + Grapple anchor kit
- + Grounding pads under float
- + Carrying handle on inside cone
- + Towing V
- + Specific marking on float
- + Flexible tank
- + Protective cover
- + Other float colours (orange, red, green...)
- + Quick deflation valves on cone
- + Additional transport bag
- + Rollover end


🛡️ QUICK INFLATION SYSTEM

🧩 CUSTOMIZATION

The SRD system consists of a compressed air or CO2 cylinder connected to the float and keel by means of an intercommunication valve system. This device allows simultaneous inflation of the whole boat in less than 45 seconds.

Customize your boat according to your specific needs. With a know-how acquired since 1962, our teams will advise you according to the specificities of your mission.

More information on: www.sillinger.com

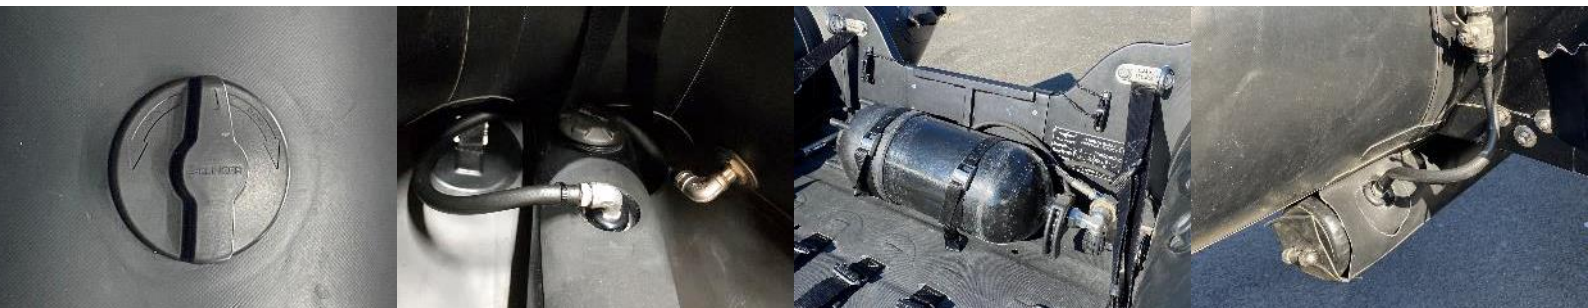

📍 14 rue de Buray - ZI des portes de Chambord
41500 Mer - France
☎ Tél. +33 (0)2 54 81 08 32
☎ Fax +33 (0)2 54 81 32 95
✉ contact@sillinger.com

SILLINGER.FR



A know-how MARCK & BALSAN